

Facestock

A white woodfree, top and back coated, thermal paper with a high sensitivity and resolution, providing excellent image stability for long-term storage, high scratch and heat resistance for handling and transportation, capable of replacing thermal transfer

Basis Weight	79 g/m ²	ISO 536
Caliper	81 µm	ISO 534
Max Print Speed	250 mm/sec	
Image Density (Typical)	1.35 odu	

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight	57 g/m ²	ISO 536
Caliper	51 µm	ISO 534

Laminate

Total Caliper	146 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	15 N/25mm	FTM 9 Glass
Peel Adhesion 90°	8 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

Adhesive Performance

The adhesive is characterized by a high initial tack, excellent adhesion and good low temperature performance on a wide variety of substrates.

Applications and use

This Direct Thermal product is designed for use in prescription label applications where long term image stability and resistance to an assortment of chemicals is required. Typical end use applications include prescription label with patient name and dosage information.

Conversion & printing

The product can be converted by all conventional roll conversion technologies including flexographic and UV letter press. However, due to the thermographic properties, exposure above 50°C may cause premature imaging or discoloration. It is advisable to test inks and varnishes before conversion.

We generally recommend not to pre-print the label area that needs to be thermally printed.

Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive side may stand in direct contact with dry, moist and such fatty foodstuffs which have a correction factor of at least 3 according to the Regulation (EU) No 10/2011.


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AB042

Fasson®

THERMAL 200SHD - S2000N-BG40BR

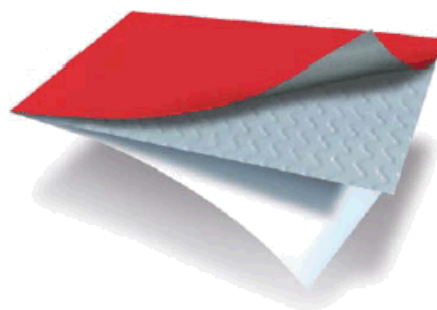

THERMAL 200SHD

S2000N

BG40BR

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

**Warranty**

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.