

### Facestock

A bi-axially oriented, gloss clear polypropylene film with a print-receptive topcoating

Basis Weight	47 g/m <sup>2</sup>	ISO 536
Caliper	52 µm	ISO 534

### Adhesive

R3200 is a semi permanent UV Hot-melt acrylic based adhesive.

### Liner

BG40 white, a supercalendered glassine paper.

Basis Weight	61 g/m <sup>2</sup>	ISO 536
Caliper	54 µm	ISO 534

### Laminate

Total Caliper	127 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	4.3 N/25mm	FTM 9 Glass
Peel Adhesion 90°	3.5 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

### Adhesive Performance

The adhesive features excellent clarity, durability, chemical and UV resistance.

### Conversion & printing

The top coated face material can be printed by letterpress, flexo, gravure and screen, giving good printing results with solvent, UV curing, waterbased inks and hot-foil blocking. Especially with waterbased and UV screen inks, careful selection of the ink and preliminary testing is essential. Material shows excellent register stability on press and excellent flat bed conversion while rotary and magnetic dies need additional care.

### Special Approvals

The adhesive complies with the European food directives and legislations, the German Recommendation XIV and FDA 21 CFR Ch.1, paragraph 175.105.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AH924

## Fasson ®

## PP NG TOP CLEAR - R3200-BG40WH

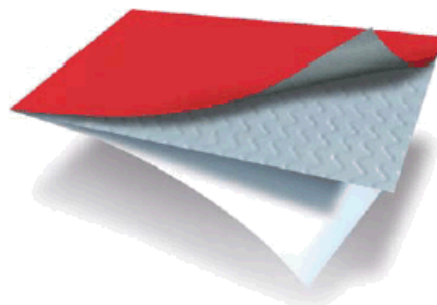

PP NG TOP CLEAR

R3200

BG40WH

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

#### Warranty

All Avery Dennison statements, technical information and recommendations are based on a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.



ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.

