

Facestock

A wet strength pearlescent coated paper with a diamond texture that provides a print surface ideal for wine, high-end beverages and gourmet foods.

Basis Weight 95 g/m² ISO 536

Caliper 127 µm ISO 534

Adhesive

Z3338 is an acrylic based adhesive engineered for cold/condensated glass surfaces.

Liner

A clear polyester liner giving optimum smoothness to the adhesive layer.

This liner is 100% recyclable. Visit our website or send an email to linerrecycling@eu.averydennison.com for more information.

Basis Weight 42 g/m² ISO 536

Caliper 30 µm ISO 534

Laminate

Total Caliper 177 µm±10% ISO 534

Performance data

Initial Tack 9 N/25mm FTM 9 glass

Peel Adhesion 90° 5 N/25mm FTM 2 st.st.; 24 hrs.

Min. Application Temp. -29 °C

Service temperature -50°C to 90°C

Adhesive Performance

Z3338 is designed to perform on cold and condensated surfaces without sacrificing good die-cutting and stripping properties. It is an ideal adhesive for improved ice bucket and cold box performance.

Applications and use

This unique material is suitable for decorative labeling on wine or beer bottles. It is not recommended on small diameters (neck labels).

For optimal dispensing a relatively high tension on the backing and a sharp beak are recommended.

Conversion & printing

Due to the textured nature of the facematerial, best results are obtained with Offset and Screen. Flexo: Trials with appropriate plates and tapes are recommended. Over-varnish is recommended.

Press stability is good with stable, constant register during conversion. Flat bed performance is good while solid and magnetic rotary dies need additional care. (Die bearers must be adjusted to the polyester liner).

Special Approvals

Z3338 is suitable for applications where compliance with FDA 175.105 is required.


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AR607

Fasson®

SPARKLING ASTI - Z3338-PET30

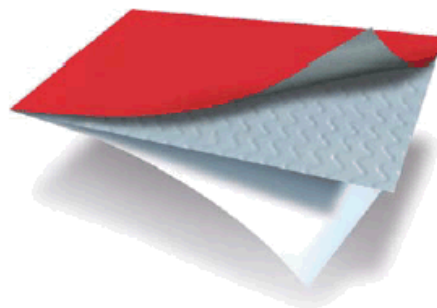

SPARKLING ASTI

Z3338

PET30

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.

ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.