

Facestock

A white, one side machine coated, woodfree printing paper with semi-gloss appearance. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	88 g/m ²	ISO 536
Caliper	78 µm	ISO 534

Adhesive

A special purpose permanent, acrylic based adhesive.

Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight	57 g/m ²	ISO 536
Caliper	51 µm	ISO 534

Laminate

Total Caliper	146 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	16 N/25mm	FTM 9 Glass
Peel Adhesion 90°	10 N/25mm	FTM 2 St.St.
Min. Application Temp.	10 °C	
Service temperature	-20°C to 80°C	

Adhesive Performance

The clear permanent adhesive combines high initial tack with excellent adhesion properties on a wide range of substrates. Excellent UV and ageing resistance.

Applications and use

The product are suitable for a wide range of promotional and industrial label applications where attractive semi-gloss appearance in multi-colour work is required.

Conversion & printing

Facestock is suitable for solid and halftone images and text printing by letterpress, flexo (UV and waterbased) offset and screen processes. Hot and cold foil stamping, varnishing and variable imprinting with thermal transfer are also suitable for this product.

REACH Compliance

Notification according to Article 33 of the REACH Regulation (SVHC) This article contains the following substance which is included on the candidate list, according to article 59 (1,10) of the REACH registration, in a concentration above 0.1% (w/w): Nonyl Phenol Ethoxylate (NPEO) (CASNo 68412-54-4)


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AA012

Fasson®

MC90 FSC - S660-BG40BR IMP

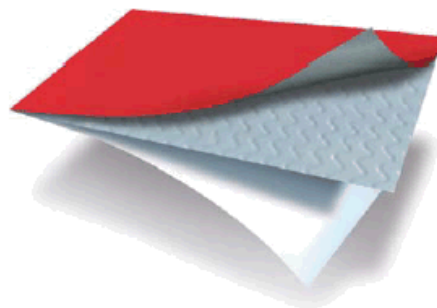

MC90 FSC

S660

BG40BR

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery

