

Facestock

A white, surface-sized, supercalendered woodfree printing paper. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	71 g/m ²	ISO 536
Caliper	71 µm	ISO 534

Adhesive

A special purpose ultra removable, rubber based adhesive.

Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight	55 g/m ²	ISO 536
Caliper	49 µm	ISO 534

Laminate

Total Caliper	144 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	.5 N/25mm	FTM 9 Glass
Peel Adhesion 90°	.2 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

Adhesive Performance

The ultra removable type of adhesive has a relatively low adhesion level which allows easy and clean removal of labels. It can be used for promotional labels. Sensitive surfaces such as book covers, premium household goods and protection labels. The adhesive is suitable for certain indoor, work-in-progress labels on windows. Due to the wide variety of coatings on window glass, testing is strongly recommended before use. Removable adhesive, by nature, have a low cohesion and might be subject to variation in the product aesthetics which could be observed on the web rolls as long as the material is not used. We recommend to store the material with the inner core in vertical position for not longer than a period of 6 months after delivery.

Applications and use

This white economical multipurpose paper provides good print resolution of picket fence barcodes and numeric data with thermal transfer print speed up to 150mm/sec. Main applications are print & apply, warehouse inventory labeling and other in-house product identification labels.

Conversion & printing

This Thermal Transfer face material is developed and selected in close co-operation with leading Thermal Transfer printer and ribbon manufacturers. The print quality of the Thermal Transfer system depends on the correct match of Thermal Transfer ribbon, printer and printing surface, therefore it is strongly recommended to test in application before use.

The smooth surface of this paper is specially suited for single and multicolour line or process printing in all the usual printing technologies. Offers superior print characteristics where a gloss surface finish is not required.


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AA018

Fasson®

VELLUM EXTRA FSC - UR400-BG40BR IMP

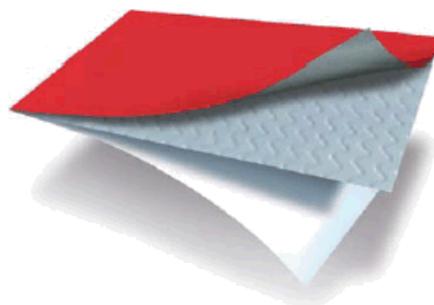

VELLUM EXTRA FSC

UR400

BG40BR

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.