

Material

A gloss, transparent, uncoated shrink PVC film. Ideal for shrink sleeve applications requiring top to bottom container decoration and up to 65% transversal shrinkage (in CD).

Basis Weight	67.5 g/m ² ±10%	ISO 536
Caliper	50 µm±10%	ISO 534
Tensile strength MD	>1300 Kg/cm ^q	ASTM D638
Tensile strength CD	<400 Kg/cm ^q	ASTM D638
Elongation MD	>150 %	ASTM D638
Elongation CD	<80 %	ASTM D638
Shrink rate (MD)	≤4 %	ASTM D1204 (95°C per 30 sec. in water)
Shrink rate (CD)	65 %	ASTM D1204 (95°C per 30 sec. in water)

Applications and use

This product is ideal for applications such as sleeves for dairy products in round shaped bottles, promotional beer bottle sleeves for football events and eye-catching sleeves for sparkling wine bottles.

Conversion & printing

The product can be converted by the following conventional roll conversion technologies: flexo, offset and rotogravure. Compatible with solvent and UV inks. **IMPORTANT NOTS:** Exact ink systems should be recommended by your ink supplier and special care should be taken regarding web temperature and winding tension.

Special Approvals


For storage it is recommended that room temperature is employed to minimize the risk of unnecessary shrinkage. Suitable for 6 months from the date of delivery and stocks should be used in rotation. The material should be allowed to reach operating room temperature for 48/24 hours before being used. Do not expose to direct sunlight!

Shelf life

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AB029

Fasson®
SHRINK PVC CL 1S-50 HS

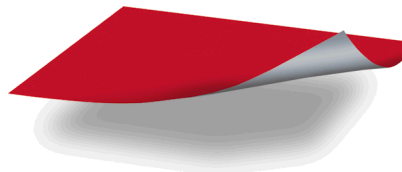

SHRINK PVC CL 1S-50 HS

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.