

### Facestock

A white, 2-side clay-coated, matt finished, high opacity polypropylene film.

Basis Weight	92 g/m <sup>2</sup>	ISO 536
Caliper	120 µm	ISO 534

### Adhesive

A general purpose permanent, rubber based adhesive for the wine industry.

### Liner

BG45 white FSC is a supercalendered glassine paper.

Basis Weight	70 g/m <sup>2</sup>	ISO 536
Caliper	61 µm	ISO 534

### Laminate

Total Caliper	204 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	23 N/25mm	FTM 9 Glass
Peel Adhesion 90°	12 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-30°C to 70°C	

### Adhesive Performance

The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, and slightly rough substrates.

### Applications and use

This product is designed for Wine labelling with exceptional water resistance specially for demanding ice bucket application. It offers the same level of whiteness and opacity wet versus dry. It resists all humid conditions with no risk of bubbling.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

### Conversion & printing

Printable by all conventional printing techniques. Excellent results, in line with desired image, using offset or screen. The matt finished is sensitive to impact and scratches, thus it is recommended to apply a varnish on the printing to protect it.

### Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XXI as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AB116

## Fasson®

### PP120 MATT WINE - S2047N- BG45WH IMP FSC

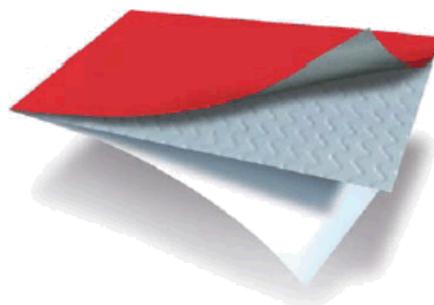

PP120 MATT WINE

S2047N

BG45WH FSC

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000



#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.