

### Facestock

A matt coated, supercalendered woodfree white printing paper with a wet-strength and fungicidal treatment. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	90 g/m <sup>2</sup>	ISO 536
Caliper	86 µm	ISO 534

### Adhesive

WLA is a transparent, dispersion-based permanent, acrylic adhesive.

### Liner

BG45 white FSC is a supercalendered glassine paper.

Basis Weight	70 g/m <sup>2</sup>	ISO 536
Caliper	61 µm	ISO 534

### Laminate

Total Caliper	163 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	18 N/25mm	FTM 9 Glass
Peel Adhesion 90°	7 N/25mm	FTM 2 St.St.
Min. Application Temp.	10 °C	
Service temperature	-20°C to 80°C	

### Adhesive Performance

WLA permits residue-free removal of bottle labels when washed in an alkali solution. It is ideal for the labelling of returnable bottles.

### Applications and use

This product is designed for Wine labelling, it is suitable for primary labelling of high and premium goods eg: spirits, specialist foods.

It is recommended to use an alkaline solution with 1.5% lye, with a min. temperature of 80°C for the bottle washing. The removability is substantially influenced by the wash off temperature (the higher the temperature, the shorter the wash off time), by the type of paper used, by the kind of print (line or halftone varnished or laminated) and the storage and weathering of applied label. As these are factors outside Avery Dennison control, we cannot guarantee trouble free removal in every possible application. It is therefore absolutely essential that the printed label be checked for the removability under the actual conditions of use. The use of non permeable faces is not recommended as these faces will result in a poor washability function.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

### Conversion & printing

Printable by all conventional printing techniques screen, offset, Flexography, or hot foil.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AB224

## Fasson ®

## MATT WINE FSC - WLA-BG45WH FSC

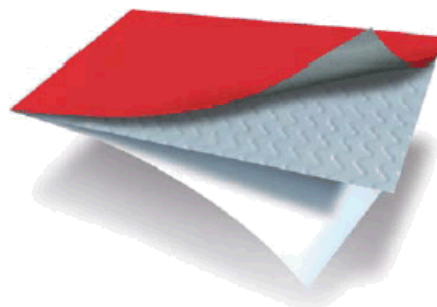

MATT WINE FSC

WLA

BG45WH FSC

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000



#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.