

Facestock

A gloss transparent polyester film. The smooth surface is covered with a topcoat for excellent ink anchorage.

Basis Weight	71 g/m ²	ISO 536
Caliper	50 µm	ISO 534

Adhesive

S333 is an excellent, general purpose industrial grade clear adhesive.

Liner

BG42 white, a supercalendered glassine paper.

Basis Weight	64 g/m ²	ISO 536
Caliper	57 µm	ISO 534
Transparency	50 %	DIN 53147

Laminate

Total Caliper	134 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	9 N/25mm	FTM 9 Glass
Min. Application Temp.	5 °C	
Service temperature	-40°C to 150°C	
Peel Adhesion 90°	6 N/25mm	FTM 2 st.st. 24hr

Adhesive Type	Emulsion Acrylic	
Adhesive weight	26 g/m ²	FTM12

Adhesive Performance

S333 features low adhesive ooze, high initial tack and ultimate adhesion on high surface energy substrates.

Applications and use

Transfer PET trans TOP is designed for conversion into identification, warning and tracking labels for durable goods and other industrial products. Thanks to the special surface coating, variable information such as batch and part numbers can be printed by thermal transfer. Transfer PET trans Top can also be used as an overlamine to protect the underlying print and improve the rigidity of the base label.

The adhesive S333 is globally available.

Conversion & printing

Excellent results can be achieved with thermal transfer printers equipped with conventional or near-edge print heads using resin ribbons. This product is qualified by EFI Jetrion and Durst for UV inkjet printing. Transfer PET trans TOP can also be printed by all conventional roll label techniques, including flexo, UV letterpress, silkscreen.

For easy diecutting sharp corners should be avoided.



Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AC269

Fasson®

TRANSFER PET TRANS TOP - S333-BG42WH

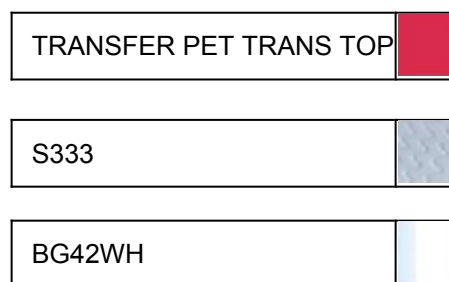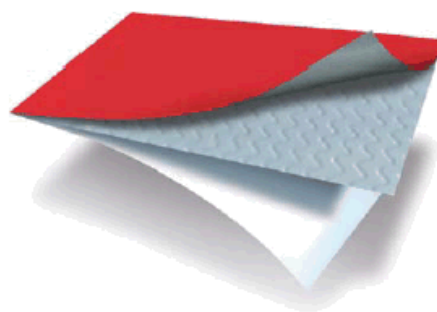

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
 2342 BH Oegstgeest
 The Netherlands
 +31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.

ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.