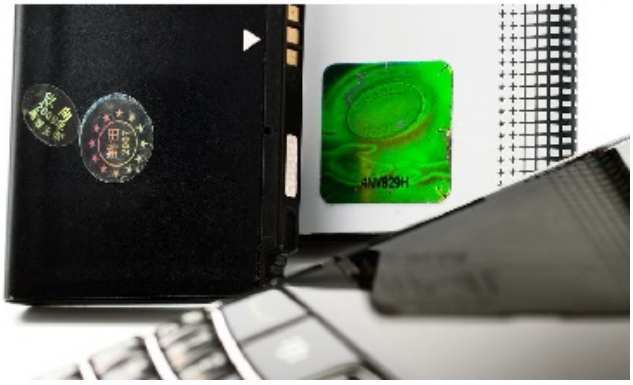

AD225

Fasson ® TRANSFER PET WHITE PT - S8030-BG42WH

Key features

> Good TT printability.

> Solvent acrylic adhesive featuring high tack and peel adhesion on a wide variety of substrates, including low surface energy plastics.

> UL recognised label material.

AVERY DENNISON | Inspired Brands. Intelligent World.™

AD225

Fasson ®

TRANSFER PET WHITE PT - S8030-BG42WH



TRANSFER PETWH PT	
S8030	
BG42WH	

Facestock

A gloss white polyester film. The smooth surface is print treated to achieve good TT printability and ink anchorage.

Basis Weight	71 g/m²	ISO 536
Caliper	50 µm	ISO 534

Adhesive

S8030 is a high strength permanent solvent based acrylic adhesive.

Liner

BG42 white, a supercalendered glassine paper.

Basis Weight	64 g/m²	ISO 536
Caliper	57 µm	ISO 534
Transparency	50 %	DIN 53147

Laminate

Total Caliper	132 µm±10%	ISO 534

Performance data

Initial Tack	22.5 N/25mm	FTM 9 Glass
Min. Application Temp.	7 °C	
Service temperature	-40°C to 150°C	
Peel Adhesion 90°	12 N/25mm	FTM 2 st.st. 24hr
Adhesive Type	Solvent Acrylic	

Applications and use

Transfer PET White PT is specifically developed for Durable Goods labelling. Typical examples are identification and warning labels on electronic devices and household appliances.
This all-round performing product provides good adhesion onto low surface energy plastics combined with the long term durability expected from a solvent acrylic adhesive.

Conversion & printing

The glossy, smooth surface is print treated and can be thermal transfer printed, the best results can be obtained with resin ribbons. This product is qualified by EFI Jetrion and Durst for UV inkjet printing. It can be printed by all conventional print technologies.

UL Recognition

This product meets the requirements as stated in UL 969 for indoor use. The UL file number is MH27538.

Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.
If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Inspired Brands.
Intelligent World.™

Avery Dennison Materials Group Europe
Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty
All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see http://terms.europe.averydennison.com

©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.