

Facestock

A gloss white, specially print-treated polyester film.

Basis Weight	70 g/m ²	ISO 536
Caliper	50 µm	ISO 534

Adhesive

A special purpose permanent, acrylic based UV hotmelt adhesive.

Liner

BG45 white, a supercalendered glassine paper.

Basis Weight	70 g/m ²	ISO 536
Caliper	63 µm	ISO 534
Transparency	50 %	DIN 53147

Laminate

Total Caliper	154 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	24 N/25mm	FTM 9 Glass
Peel Adhesion 90°	16 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 120°C	

Adhesive Performance

S3100 features excellent tack and adhesion to a wide variety of substrates including apolar surfaces.

Applications and use

Transfer PET White PT is specifically developed for durable applications. The glossy, smooth surface is print treated and can be thermal transfer printed. The best results can be obtained with resin ribbons. For special requirements we strongly recommend application tests.

Conversion & printing

Can be printed by all the conventional print technologies.


Shelf life

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AE335

Fasson®

PET WHITE PT - S3100 INC-BG45WH

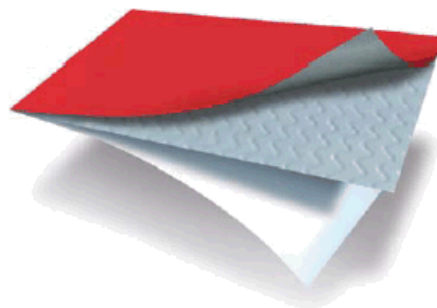

PET WHITE PT

S3100

BG45WH

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as



ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or



Inspired Brands.
Intelligent World.™

Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.

reproduced in whole or in part for any purposes other than marketing by Avery Dennison.