

### Facestock

Transparent cellulose acetate gloss clear film. The material is biodegradable and compostable.

Basis Weight	66 g/m <sup>2</sup>	ISO 536
Caliper	50 µm	ISO 534

### Adhesive

A permanent, acrylic based adhesive.

### Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight	62 g/m <sup>2</sup>	ISO 536
Caliper	56 µm	ISO 534

### Laminate

Total Caliper	126 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	11 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-40°C to 90°C	

### Adhesive Performance

The adhesive is perfectly suitable for uses that need a good resistance to UV, fats or solvents. Good general adhesion performance on a wide range of substrates.

### Applications and use

Transparent labels (gloss appearance) for cosmetic and pharmaceutical applications. The face material intrinsic fragility brings a certain inviolability of the label linked with a permanent adhesive defined for the substrate. Because of its nature with cellulose, the product has little moisture resistance.

### Conversion & printing

Can be printed by flexo, gravure, screen and hot foil stamping. Due to its non-absorbent surface, fast drying inks should be used with letterpress and offset. Excellent conversion characteristics on flatbed and rotary presses.

### Special Approvals

The Acetate Clear facestock is certified Industrial Compostable according to the European Standard EN13432. In addition the film has accreditation to the TUV Austria OK Compost Home.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AF289

## Fasson®

### ACETATE CLEAR - S697-BG40BR

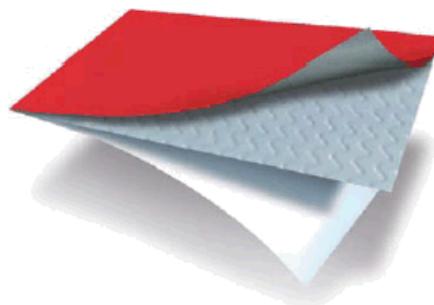

ACETATE CLEAR

S697

BG40BR

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.



Inspired Brands.  
Intelligent World.™