

Material

One side acrylic coated clear BOPP.

| | | |
|-----------------------|------------------------|-------------|
| Basis Weight | 54 g/m ² | ISO 536 |
| Caliper | 59 µm | ISO 534 |
| Tensile Str. MD | 210 MN/m ² | DIN 53455 |
| Tensile Str. CD | 170 MN/m ² | DIN 53455 |
| Elongation MD | 80 % | DIN 53455 |
| Elongation CD | 110 % | DIN 53455 |
| Gloss 45° | 85 % | ASTM D 2457 |
| Haze | <2 % | ASTM D1003 |
| Elasticity modulus MD | 2900 MN/m ² | DIN 53455 |

Applications and use

Applications include labelling of quality products such as cosmetics, toiletries, luxury articles and promotional labelling.

Conversion & printing

This product has a top coating which gives outstanding printing performance across a wide variety of printing processes including flexography, letterpress, offset, silkscreen, gravure and hot or cold foiling processes. It is highly compatible with UV, water-based and solvent-based inks. However, exact ink and foil systems should be recommended by your ink supplier.


Special Approvals

For storage it is recommended that dry conditions at temperatures below 30°C are employed to minimise any deterioration of surface discharge treatment level.

Shelf life

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AG117 Fasson® PP TOP CLEAR 1S-60

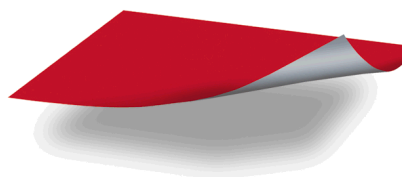

PP TOP CLEAR 1S-60

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.



ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.