

Facestock

A white, cast coated gloss finished, woodfree printing paper. The facestock has a special black coating on the adhesive side to give optimum opacity.

Basis Weight 92 g/m² ISO 536

Caliper 90 µm ISO 534

Adhesive

A special purpose permanent, acrylic based adhesive.

Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight 57 g/m² ISO 536

Caliper 51 µm ISO 534

Laminate

Total Caliper 158 µm±10% ISO 534

Performance data

Initial Tack 16 N/25mm FTM 9 Glass

Peel Adhesion 90° 10 N/25mm FTM 2 St.St.

Min. Application Temp. 10 °C

Service temperature -20°C to 80°C

Adhesive Performance

The clear permanent adhesive combines high initial tack with excellent adhesion properties on a wide range of substrates. Excellent UV and ageing resistance.

Applications and use

Opaque "coverall" materials are traditionally used for overlabelling of errors or size changes on existing printed materials - or for barcoding where the underlying substrate may interfere with scanability. It is also used for the relabelling of obsolete pre-printed packaging for inventory control purposes.

Conversion & printing

This glossy, cast coated facesetock is specially suited to provide top print quality in all processes, whether single or multicolour, line or process colour printing.

REACH Compliance

Notification according to Article 33 of the REACH Regulation (SVHC) This article contains the following substance which is included on the candidate list, according to article 59 (1,10) of the REACH registration, in a concentration above 0.1% (w/w): Nonyl Phenol Ethoxylate (NPEO) (CASNo 68412-54-4)


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AG227

Fasson®

GLOSSCOVER PREMIUM - S660- BG40BR IMP

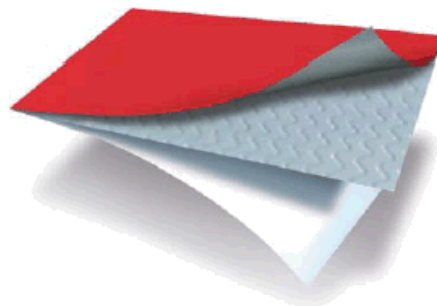

GLOSSCOVER PREMIUM

S660

BG40BR

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are



Inspired Brands.
Intelligent World.™

determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.