

Material

A supercalandered white glassine paper, siliconized and with high release.

Basis Weight	61 g/m ²	ISO 536
Caliper	55 µm	ISO 534

Applications and use

For direct and indirect adhesive coating applications. Particularly suitable as a release paper for die-cutting self adhesive labels.

Conversion & printing


Specially designed for high speed conversion, punching and perforation. Not suitable for printing due to silicone residues.

Shelf life

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AG313

Fasson® LINER BG40WH HR

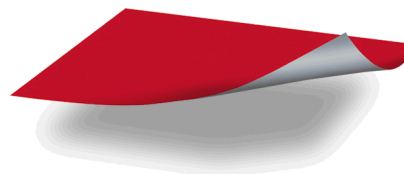

LINER BG40WH HR

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.