

### Facestock

A matt, white woodfree machine finished paper with good opacity, excellent absorption and superior toner bonding characteristics.

Basis Weight 64 g/m<sup>2</sup> ISO 536

Caliper 75 µm ISO 534

### Adhesive

A general purpose permanent, acrylic based adhesive.

### Liner

CopyBack is a PE coated release liner with an encapsulated, impact sensitive black imaging copy system.

Basis Weight 75 g/m<sup>2</sup> ISO 536

Caliper 85 µm ISO 534

### Second Adhesive

A general purpose permanent, acrylic based adhesive.

### Second Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight 57 g/m<sup>2</sup> ISO 536

Caliper 51 µm ISO 534

### Laminate

Total Caliper 241 µm±10% ISO 534

### Performance data

Initial Tack 11 N/25mm FTM 9 Glass

Peel Adhesion 90° 7 N/25mm FTM 2 St.St.

Min. Application Temp. 5 °C

Service temperature -20°C to 80°C

### Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

### Applications and use

The face material is designed for the manufacture of A4 sheets for use in laserprinters, copiers, monochrome and colour inkjet printers. The surface structure provides excellent toner bonding and print resolution.

This makes it ideal for label applications using variable information such as address, instruction and inventory labels, labels for office use and many other applications.

Products with CopyBack materials are mainly in for parcel tracking, promotional or discount labelling and applications linked to mailings.

The special product lay-out could have an influence on conversion speed

### Conversion & printing

Facestock is suitable for simple line or process printing by flexo and offset.

The material can be converted by the conventional roll-to-sheet conversion technologies.


### Special Approvals






S692N complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA § 175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive S692N may safely stand in direct contact with dry, moist and fatty foodstuffs

## AL662
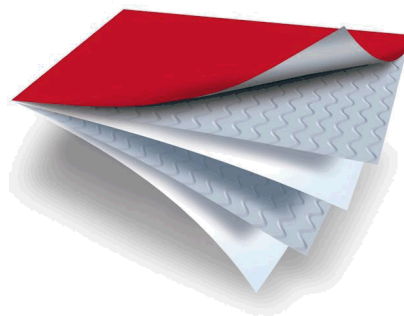
### Fasson®

PB LCJ - 2XS692N-CB/BG40BR



LCJ PREMIUM	
S692N	
CB	
S692N	
BG40BR	

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

which have a reduction factor of at least 2 according to the Commission Regulation (EU) No 10/2011, with ethanol 95% as fatty food simulant used for migration testing.

S692N complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA § 175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive S692N may safely stand in direct contact with dry, moist and fatty foodstuffs which have a reduction factor of at least 2 according to the Commission Regulation (EU) No 10/2011, with ethanol 95% as fatty food simulant used for migration testing.

#### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.



ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.