

Facestock

A matt white polyester film. The surface is covered with a matt topcoat designed for thermal transfer imprinting.

Basis Weight	115 g/m ²	ISO 536
Caliper	82 µm	ISO 534

Adhesive

S8049 is a rubber hybridised acrylic adhesive.

Liner

BG42Wh BSS: on both sides siliconized glassine paper, wood-free, super calandered and extremely tough and tear-resistant despite its thinness.

Basis Weight	64 g/m ²	ISO 536
Caliper	55 µm	ISO 534
Transparency	45 %	DIN 53147

Laminate

Total Caliper	188 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	27 N/25mm	FTM 9 glass
Min. Application Temp.	5 °C	
Service temperature	-40°C to 150°C	
Adhesive Type	rubber hybridised acrylic, solvent	

Adhesive weight	45 g/m ²	FTM12
Peel Adhesion 90°	27 N/25mm	FTM 2 st.st. 24hr

Adhesive Performance

S8049 combines extreme high final adhesion on a wide variety of surfaces including textured and low surface energy substrates with excellent chemical and temperature resistance.

Applications and use

Transfer PET 75 matt white was specially developed for industrial labels and thermal transfer applications. Thanks to the special surface coating, excellent results can be achieved with thermal transfer printers equipped with conventional or near-edge print heads and using either wax/resin or pure resin ribbons. The main area of application for Transfer PET matt white is the labelling of industrial products. Nameplates and logistics labels are typical examples. This film is distinguished by its high chemical resistance. Thanks to the high caliper of the front material it can be manually applied easier than other polyester labels.

This is a premium product for the automotive industry using patented Avery Dennison RHA (rubber hybridised acrylic) adhesive technology. It is designed primarily for creating labels to be applied onto low surface energy plastic automotive parts or other rough or low surface energy surfaces. The product is briefly repositionable and then the adhesion increases to very high ultimate peelstrength. S8049 products are engineered to be resistant to - also harsh - chemicals commonly found in the automotive and electronics industry.


Conversion & printing


In addition to thermal transfer printing the product can also be printed by all conventional roll label techniques, such as flexo, UV letterpress, silkscreen. UV inkjet printing is possible with

AL851

Fasson ®

TRANSF PET75 MATT WHITE - S8049-BG42WH BSS

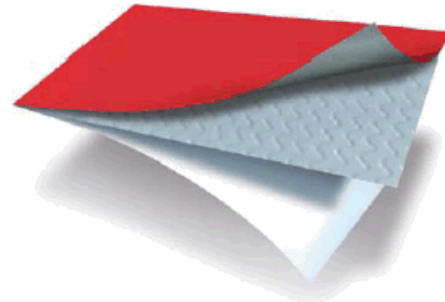

TRANSFER PET75 MATT WH	
---------------------------	---

S8049	
-------	---

BG42WH BSS	
------------	---

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Durst equipment (Tau 150 and 330). Specific testing is required.

For easy diecutting sharp corners should be avoided.

The backside siliconisation of the liner aids the conversion of this material as it reduces the risk of labels transferring to the backside of the label stock after diecutting.

Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.