

Material

Two side coated white BOPP

Basis Weight	26 g/m ²	ISO 536
Caliper	40 µm	ISO 534
Tensile strength MD	100 MPa	ASTM D882
Tensile strength CD	155 MPa	ASTM D882
Elastic Modulus MD	1300 MPa	ASTM D882
Elastic Modulus CD	2100 MPa	ASTM D882
Elongation MD	140 %	ASTM D882
Elongation CD	50 %	ASTM D882
Gloss 45°	75 %	ASTM D2457
Seal strength	450 g/2.5 cm	130°C, 0.3 MPa, 0.2 sec
Heat Seal Range (Otto Brugger)	50 °C	0.250 MPa, 0.2 sec
Coefficient of Friction (both sides same)	.25	ASTM D1894
Water Vapor Transmission Rate (38°C, 90% RH)	5.2 g/m ² /24 hr	ASTM F1249
Oxygen Transmission Rate (23°C, 0% RH)	800 cm ³ /m ² /24 hr	ASTM D3985

Applications and use

This white BOPP film is predominantly used to pack Bakery, Biscuits/Cookie/Crackers, Confectionery and snack foods on HFFS and VFFS packaging machines. It can be used as single web packaging material or in as a laminate in conjunction with other filmic materials.

Conversion & printing

This one side acrylic coated BOPP film is an ideal support for normal ink systems and water based inks. Printing is predominantly in solvent flexo and solvent rotogravure. IMPORTANT NOTES: A trial is always needed to verify the product / end use suitability.


Shelf life

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AM700

Fasson®

BOPP FLEXPAC TOPWH 1S-40

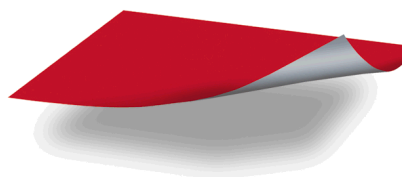

BOPP FLEXPAC TOPWH 1S-40

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.



ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.



Inspired Brands.
Intelligent World.™