

Facestock

A clear corona treated, bi-axially oriented polypropylene film.

Basis Weight	27 g/m ²	ISO 536
Caliper	30 µm	ISO 534

Adhesive

M7500 is a clear permanent solvent based adhesive.

Liner

A clear polyester liner giving optimum smoothness to the adhesive layer.

This liner is 100% recyclable. Visit our website or send an email to linerrecycling@eu.averydennison.com for more information.

Basis Weight	32 g/m ²	ISO 536
Caliper	23 µm	ISO 534

Laminate

Total Caliper	71 µm±10%	ISO 534
---------------	-----------	---------

Performance data

Initial Tack	11.5 N/25mm	FTM 9 glass
Peel Adhesion 90°	6.9 N/25mm	FTM 2 st.st. 24hr

Min. Application Temp.	5 °C
Service temperature	-20°C to 90°C

Adhesive Performance

A clear, permanent, solvent based adhesive that maintains clarity and is designed specifically for returnable beer and beverage applications that require resistance to water. Engineered to be applied to dry and clean surfaces of new bottles. After the label is applied, it will not be affected by moist environment typical for bottling breweries and all process steps during the bottle filling for 30+ cycles. Maintains clarity during extended exposure to ice water (72 hours). Also has excellent wet-out, converting, stripping and dispensing characteristics. To ensure maximum durability we recommend to have sample bottles analyzed prior to application (in our lab facility).

Applications and use

Automatic application: The robust film liner allows for consistent, snap free, application on high speed lines.

Conversion & printing

The material can be printed by conventional printing techniques including flexo, screen, offset, letterpress, silkscreen, gravure, and hot foiling processes. UV, water-based and solvent-based inks can be used. Inline corona treatment is recommended for optimum ink adhesion. Overlaminating of the printed face material gives excellent scratch resistance and allows high speed dispensing.

As the liner is transparent, the applicator must detect the print itself or registration marks must be provided on either face or liner.

Press stability is good with stable, consistent register during conversion. Flat bed performance is good while solid and magnetic rotary dies need additional care. (Die bearers must be adjusted to the polyester liner).


Shelf life

Two years under storage conditions as defined by FINAT (20-

AM868

Fasson®

PP30 CLEAR BASE - M7500-PET23

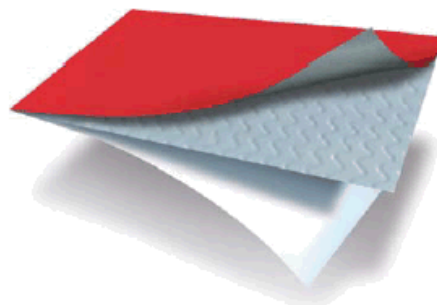

PP30 CLEAR

M7500

PET23

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

25°C; 40-50%RH)

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.



ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.