

Facestock

A matt white polyethylene film with a smooth, absorbent, ink receptive topcoating.

Basis Weight	90 g/m ²	ISO 536
Caliper	110 µm	ISO 534

Adhesive

A special purpose permanent, rubber based adhesive for the pharmaceutical industry.

Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight	55 g/m ²	ISO 536
Caliper	49 µm	ISO 534

Laminate

Total Caliper	184 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	23 N/25mm	FTM 9 Glass
Peel Adhesion 90°	12 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service temperature	-40°C to 70°C	

Adhesive Performance

The adhesive S2060NP is suitable for pharmaceutical applications at low temperatures (around 5°C) and for secondary blood bag labelling. High initial tack and excellent adhesion on glass, PE, PP and cardboards.

Applications and use

Applications include medium life durable tracking labels in outdoor environments eg chemical drum labels, stretch and shrink wrapped pallet labels where recycling may be required. Own testing under practise conditions recommended.

Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assesment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs. It is in compliance with DIN ISO 3826 for secondary blood bag labelling.


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AN038

Fasson®

TRANSFER PEHD - S2060NP- BG40BR

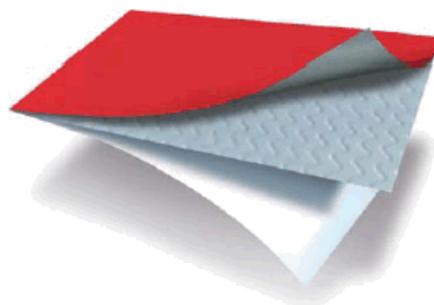

TRANSFER PE HD	
----------------	--

S2060NP	
---------	---

BG40BR	
--------	---

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see



©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery



Inspired Brands.
Intelligent World.™

<http://terms.europe.averydennison.com>

Dennison.