

### Facestock

A bi-axially oriented, gloss clear polypropylene film with a print-receptive topcoating.

Basis Weight	46 g/m <sup>2</sup>	ISO 536
Caliper	50 µm	ISO 534

### Adhesive

A special permanent, acrylic based adhesive, for the pharmaceutical industry.

### Liner

BG40 white, a supercalendered glassine paper.

Basis Weight	60 g/m <sup>2</sup>	ISO 536
Caliper	53 µm	ISO 534

### Laminate

Total Caliper	124 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	11 N/25mm	FTM 9 Glass
Peel Adhesion 90°	6.5 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	
Peak Adhesive Stability (1hr)	150 °C	

### Adhesive Performance

S692NP is a clear permanent adhesive developed for the pharmaceutical industry with lowest risk for migration. It has excellent UV resistance together with good adhesion performance, even on apolar substrates.

### Applications and use

Typical applications include labels for use in the pharmaceutical industry, applications on small cylindrical containers, curved substrates and on other known substrates in the pharmaceutical industry.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

### Conversion & printing

The top-coated face material can be printed by letterpress, flexo, gravure and screen, giving good printing results with solvent, UV curing, waterbased inks and hot-foil blocking. Material shows very good register stability on press.

### Special Approvals

S692NP complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA § 175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive S692NP may safely stand in direct contact with dry, moist and non fatty foodstuffs according to the Commission Regulation (EU) No 10/2011. It further complies with DIN ISO 3826-1.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AN869

### Fasson®

#### PP NG TOP CLEAR - S692NP-BG40WH FSC

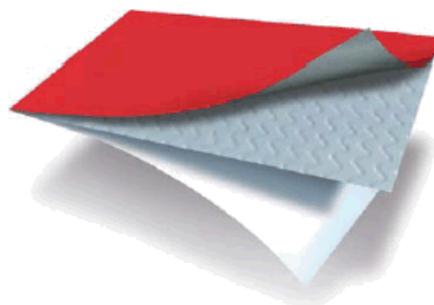

PP NG TOP CLEAR

S692NP

BG40WH FSC

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

**Avery Dennison Materials Group Europe**

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

**Warranty**

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.