

### Material

A white, two sides machine coated, super-calendered woodfree printing paper with a matt appearance.

Basis Weight	200 g/m <sup>2</sup>	ISO 536
Caliper	165 µm	ISO 534
Gloss Gardner 75° angle	<45 %	ISO 8254-1
Opacity	>98 %	ISO 2471
Brightness	97 %	ISO 2470 (D65)
Surface smoothness, Bekk	250 s	ISO 5627

### Applications and use

Application include inventory, address, transportation and product identification labels.

### Conversion & printing

This Thermal Transfer face material is developed and selected in close co-operation with leading Thermal Transfer printer and ribbon manufacturers. The print quality of the Thermal Transfer system depends on the correct match of Thermal Transfer ribbon, printer and printing surface, therefore it is strongly recommended to test in application before use.

The smooth surface of this paper is specially suited for single and multicolour line or process printing in all the usual printing technologies. Offers superior print characteristics where a gloss surface finish is not required.


### Shelf life

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AO409

## Fasson®

## TRANSFER MC MATT 2S-200

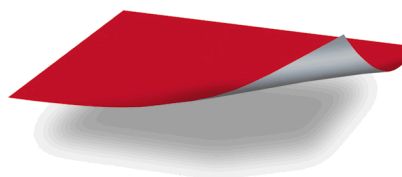

TRANSFER MC MATT 2S-  
200



*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.



ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.