

### Facestock

An aluminized and coated mechanical brushed PET film.

|              |                     |         |
|--------------|---------------------|---------|
| Basis Weight | 70 g/m <sup>2</sup> | ISO 536 |
| Caliper      | 50 µm               | ISO 534 |

### Adhesive

A general purpose permanent, acrylic based adhesive.

### Liner

BG40 white, a supercalendered glassine paper.

|              |                     |         |
|--------------|---------------------|---------|
| Basis Weight | 61 g/m <sup>2</sup> | ISO 536 |
| Caliper      | 54 µm               | ISO 534 |

### Laminate

|               |            |         |
|---------------|------------|---------|
| Total Caliper | 123 µm±10% | ISO 534 |
|---------------|------------|---------|

### Performance data

|                        |               |              |
|------------------------|---------------|--------------|
| Initial Tack           | 11 N/25mm     | FTM 9 Glass  |
| Peel Adhesion 90°      | 7 N/25mm      | FTM 2 St.St. |
| Min. Application Temp. | 5 °C          |              |
| Service temperature    | -20°C to 80°C |              |

### Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

### Applications and use

The brushed film is designed to meet the special needs of the graphic arts industry, mainly used for decoration in spirits, beverage, food and personal care applications.

### Conversion & printing

The material can be printed by flexo and offset. The top coating ensures perfect keying of the ink, especially in cases where UV - curing inks are used.

### Special Approvals

S692N complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA § 175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive S692N may safely stand in direct contact with dry, moist and fatty foodstuffs which have a reduction factor of at least 3 according to the Commission Regulation (EU) No 10/2011.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AO453

### Fasson ®

PET50 BRUSHED SILVER - S692N-  
BG40WH

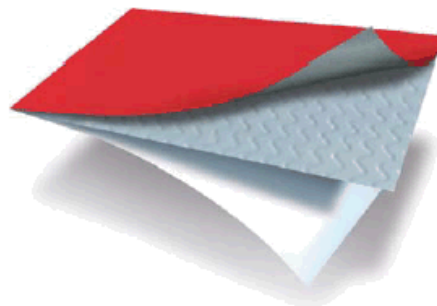

PET50 BRUSHED SILVER

S692N

BG40WH

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.



Inspired Brands.  
Intelligent World.™