

### Facestock

A bright white semi-gloss coated card. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight 130 g/m<sup>2</sup> ISO 536

Caliper 96 µm ISO 534

### Adhesive

A general purpose permanent, rubber based adhesive.

### Liner

BG40 brown FSC certified, supercalendered glassine paper.

Basis Weight 57 g/m<sup>2</sup> ISO 536

Caliper 51 µm ISO 534

### Laminate

Total Caliper 162 µm±10% ISO 534

### Performance data

Initial Tack 22 N/25mm FTM 9 Glass

Peel Adhesion 90° 11 N/25mm FTM 2 St.St.

Min. Application Temp. 0 °C

Service temperature -40°C to 70°C

### Adhesive Performance

The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, slightly rough and curved substrates. Particularly good performance at lower temperatures, e.g. labeling of chilled products.

### Applications and use

The product is suitable for use where rigid or high caliper face material is required for functional reasons. This can include printed and folded 'header cards', 'banding' and 'reinforcement'. In areas of VIP tracking the product is used on uneven surfaces where bar codes may be distorted with conventional labels or where applied label must 'flag' clearly from the substrate for reasons of poor visibility and / or accessibility of scanning equipment.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451)

### Conversion & printing

Facestock can be printed by all conventional roll label technologies and is especially suited to offset litho process.

### Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XXI as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AO572

### Fasson®

COATED CARD130 FSC - S2045N-  
BG40BR FSC

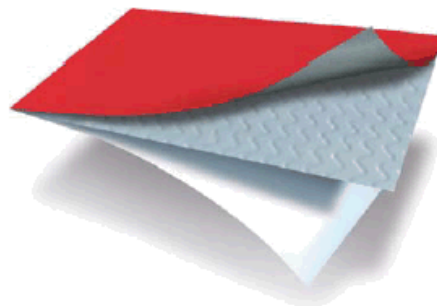

COATED CARD130 FSC

S2045N

BG40BR FSC

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest

The Netherlands  
+31 (0)85 000 2000



#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.