

Material

Clear, biaxially-oriented polypropylene film, with high strength in the machine and cross directions, coated with a clear emulsion acrylic adhesive and wound on itself.

Caliper	32.9 µm	T411
Caliper (film only)	25.4 µm	T411
Elongation at break MD	160 %	
Elongation at break CD	60 %	
Application temperature range	0 to +65 °C	
Operating temperature range	-15 to +80 °C	
Peel adhesion to steel	368 gr/in	30 min conditioning, 180 degree, 12 sec/in
Peel adhesion to steel	453 gr/in	24H conditioning, 180 degree, 12 sec/in

Applications and use

The use of overlaminating film can aid in label dispensing. Commonly used to enhance durability in harsh environments. Appropriate for high moisture and high abrasion packaging applications, such as food packaging and durable goods' labeling. Can also be used for reinforcing printed media or applied as an overlaminate for flexible packaging applications.

Conversion & printing

This film is not designed for printing. When diecutting overlaminated pressure sensitive constructions, dies should be clean, sharp, and tooled for this purpose.


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

Ao594

Fasson®

SELFWOUND PP 25 CL LOW

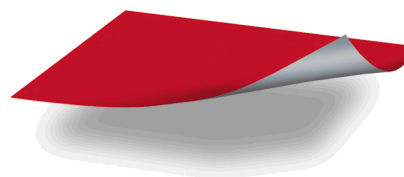

SELFWOUND PP 25 CL LOW

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or report a mistake on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.



ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.