

Facestock

A matt, white woodfree machine finished paper with good opacity, very good absorption and toner bonding characteristics. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	70 g/m ²	ISO 536
Caliper	78 µm	ISO 534

Adhesive

An emulsion, acrylic semi-permanent adhesive with good reclosure properties.

Liner

Hygroflat 55, a one side coated, bleached kraft paper. The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	55 g/m ²	ISO 536
Caliper	58 µm	ISO 534

Laminate

Total Caliper	154 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	7 N/25mm	FTM 9 Glass
Peel Adhesion 90°	3.5 N/25mm	FTM 2 St.St.
Min. Application Temp.	-15 °C	
Service temperature	-30°C to 80°C	

Adhesive Performance

The adhesive has good UV resistance and relatively long term removability, it allows application at a wide temperature range and retains its removability properties at fairly low temperatures. The adhesive is specially designed for VIP products, e.g. for laserprinters and copiers. The adhesive is developed for apolar substrates, such as plastics.

Applications and use

This face material is designed for the manufacture of A4 sheets for use in laserprinters, copiers, monochrome inkjet and standard quality colour inkjet printers. The surface structure provides very good toner bonding and print resolution.

The product is ideal for label applications using variable information such as address, instruction and inventory labels, labels for office use and many other applications.

The hygroflat backing paper is specially suited to the more critical refolding demands of high-speed computer printers, providing optimum layflatness and excellent interfolding characteristics.

Conversion & printing

Facestock is suitable for simple line or process printing by flexo and offset.

The material can be converted by the conventional and high-speed wide format roll-to-sheet conversion technologies.

Suitable for edge stripping.

The Backing paper can be printed with conventional printing methods.


Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für

AP444

Fasson®

LCJ70 PREMIUM FSC - LR3-HF55 FSC

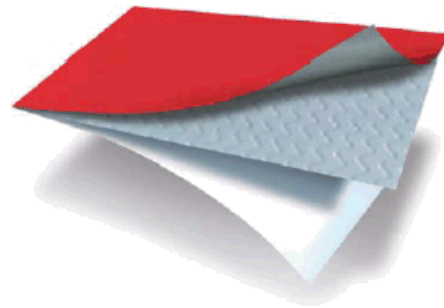

LCJ70 PREMIUM FSC	
-------------------	--

LR3	
-----	---

HF55 FSC	
----------	---

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs.

Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.