

Facestock

A matt, white woodfree machine finished paper with good opacity, excellent absorption and superior toner bonding characteristics. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	64 g/m ²	ISO 536
Caliper	75 µm	ISO 534

Adhesive

A special purpose removable, acrylic based adhesive.

Liner

Hygroflat 55, a one side coated, bleached kraft paper. The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	55 g/m ²	ISO 536
Caliper	58 µm	ISO 534

Laminate

Total Caliper	146 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	4.5 N/25mm	FTM 9 Glass
Peel Adhesion 90°	2.5 N/25mm	FTM 2 St.St.
Min. Application Temp.	-15 °C	
Service temperature	-30°C to 80°C	

Adhesive Performance

The specially formulated removable adhesive features good tack and adhesion performance in combination with superior and clean removability. The adhesive has good UV resistance and relatively long term removability, it allows application at a wide temperature range and retains its removability properties at fairly low temperatures. The adhesive is specially designed for VIP products, e.g. for laserprinters and copiers.

Applications and use

The face material is designed for the manufacture of A4 sheets for use in laserprinters, copiers, monochrome and colour inkjet printers. The surface structure provides excellent toner bonding and print resolution.

This makes it ideal for label applications using variable information such as address, instruction and inventory labels, labels for office use and many other applications.

The hygroflat backing paper is specially suited to the more critical refolding demands of high-speed computer printers, providing optimum layflatness and excellent interfolding characteristics.

Conversion & printing

Facestock is suitable for simple line or process printing by flexo and offset.

The material can be converted by the conventional roll-to-sheet conversion technologies.

The Backing paper can be printed with conventional printing methods.


Special Approvals




The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk

AS492

Fasson®

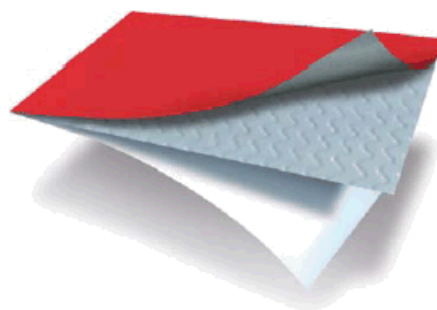LCJ PREMIUM FSC - LR2N-HF55 FSC



LCJ PREMIUM FSC	
LR2N	
HF55 FSC	

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Assesment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs.

Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.