

Facestock

A semi-gloss white, one side coated, lightweight, calendered, woodfree printing paper. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

| | | |
|--------------|---------------------|---------|
| Basis Weight | 60 g/m ² | ISO 536 |
| Caliper | 52 µm | ISO 534 |

Adhesive

A special permanent, acrylic based adhesive, for the pharmaceutical industry.

Liner

BG40 white, a supercalendered glassine paper.

| | | |
|--------------|---------------------|---------|
| Basis Weight | 60 g/m ² | ISO 536 |
| Caliper | 53 µm | ISO 534 |

Laminate

| | | |
|---------------|------------|---------|
| Total Caliper | 124 µm±10% | ISO 534 |
|---------------|------------|---------|

Performance data

| | | |
|-------------------------------|---------------|--------------|
| Initial Tack | 14 N/25mm | FTM 9 Glass |
| Peel Adhesion 90° | 8.5 N/25mm | FTM 2 St.St. |
| Min. Application Temp. | 5 °C | |
| Service temperature | -20°C to 80°C | |
| Peak Adhesive Stability (1hr) | 150 °C | |

Adhesive Performance

S692NP is a clear permanent adhesive developed for the pharmaceutical industry with lowest risk for migration. It has excellent UV resistance together with good adhesion performance, even on apolar substrates.

Applications and use

The flexible facestock allows application on small cylindrical containers, test tubes, curved substrates and on other known substrates in the pharmaceutical industry, where attractive semi-gloss appearance in multi-colour work is required. The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Conversion & printing

Facestock is suitable for solid and halftone screen images and text printing by letterpress, flexo (UV and waterbased) offset and screen processes. Hot and cold foil stamping, varnishing and variable imprinting with thermal transfer are also suitable for this product.

Special Approvals

The adhesive complies with the European food directives 1935/2004/EC and 10/2011/EC, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment.


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AS495

Fasson®

MC PHARMA FSC - S692NP-BG40WH
FSC

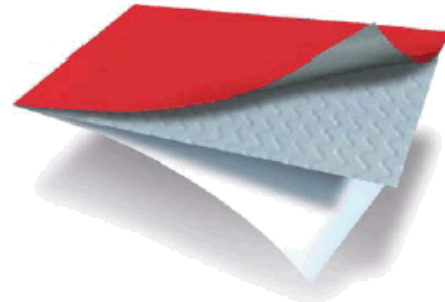

MC PHARMA FSC

S692NP

BG40WH FSC

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.