

### Facestock

A White uncoated, matt, smooth woodfree printing paper. Wet strength and fungicidal treatments. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	90 g/m <sup>2</sup>	ISO 536
Caliper	108 µm	ISO 534

### Adhesive

A general purpose permanent, acrylic based adhesive.

### Liner

A clear polyester liner giving optimum smoothness to the adhesive layer.

This liner is 100% recyclable. Visit our website or send an email to [linerrecycling@eu.averydennison.com](mailto:linerrecycling@eu.averydennison.com) for more information.

Basis Weight	32 g/m <sup>2</sup>	ISO 536
Caliper	23 µm	ISO 534

### Laminate

Total Caliper	148 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	17 N/25mm	FTM 9 Glass
Peel Adhesion 90°	7 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

### Adhesive Performance

The adhesive features high initial tack, excellent adhesion and good low temperature performance on a wide variety of substrates. Specially designed for wine labelling applications it allows easy conversion of difficult label shapes.

### Applications and use

This product is designed for Wine labelling, it is suitable for primary labelling of high and premium goods eg: spirits, specialist foods.

Automatic application: The robust film liner allows for consistent, snap free, application on high speed lines.

### Conversion & printing

Printable by all conventional printing techniques. Due to open and textured nature of the facematerial, best results are in general from those techniques with maximum conformability of printing plate such as flexo and offset. Excellent results, in line with desired image, using offset or screen.

As the liner is transparent, the applicator must detect the print itself or registration marks must be provided on either face or liner.

Press stability is good with stable, consistent register during conversion. Flat bed performance is good while solid and magnetic rotary dies need additional care. (Die bearers must be adjusted to the polyester liner).

### Special Approvals


The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry, non fatty foodstuffs.

### Shelf life

## AT729

### Fasson®

### CENTAURE BLANC FSC - S2030-PET23

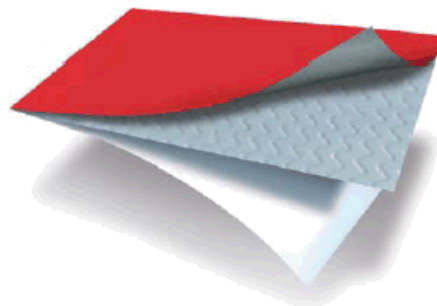

CENTAURE BLANC FSC

S2030

PET23

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

**Avery Dennison Materials Group Europe**

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

**Warranty**

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.