

Facestock

PLA is a corona-treated, white, biaxially oriented poly-lactic-acid film with good gloss appearance. PLA is made from renewable resources.

Basis Weight	63 g/m ²	ISO 536
Caliper	50 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

BG40 white, a supercalendered glassine paper.

Basis Weight	61 g/m ²	ISO 536
Caliper	54 µm	ISO 534

Laminate

Total Caliper	123 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	11 N/25mm	FTM 9 Glass
Peel Adhesion 90°	7 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

Applications and use

PLA can be used for all kind of applications, e.g. food (salads, cheese, yoghurt pots) and soft drinks.

Due to high stiffness of the film care should be taken with use of non-uniform surfaces and where a very high level of squeezability is desired. The PLA film also has a low water vapour barrier. Because of its nature care should be taken in wet conditions for long terms applications, preliminary tests are therefore recommended prior to use.

It is recommended the storage in its original wrapping away from any source of local heating or direct sunlight.

Conversion & printing

The product offers very good die-cutting properties. PLA can be converted by flexographic and rotogravure printing processes. Nitrocellulose-based inks and water based inks are suitable. Please consult your printing ink supplier about suitable printing inks. To ensure optimum wettability and ink anchorage, additional in-line corona treatment is required. Because of the heat sensibility of the face stock the drying temperature needs to be reduced to the lowest possible temperature. Opposed to this, the air flow to dry the inks needs to be increased.

Special Approvals


S692N complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA § 175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive S692N may safely stand in direct contact with dry, moist and fatty foodstuffs which have a reduction factor of at least 3 according to the Commission Regulation (EU) No 10/2011.

Shelf life

AV817

Fasson®

PLA50 WHITE - S692N-BG40WH

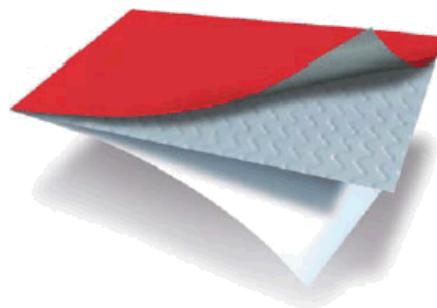

PLA50 WHITE

S692N

BG40WH

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Half a year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.