

### Facestock

A semi-gloss white, one side coated, lightweight, calendered, woodfree printing paper. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	62 g/m <sup>2</sup>	ISO 536
Caliper	59 µm	ISO 534
Fluorescence	>9	Laetus Scale

### Adhesive

A special purpose permanent, rubber based adhesive for the pharmaceutical industry.

### Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight	55 g/m <sup>2</sup>	ISO 536
Caliper	49 µm	ISO 534

### Laminate

Total Caliper	126 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	23 N/25mm	FTM 9 Glass
Peel Adhesion 90°	12 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service temperature	-40°C to 70°C	

### Adhesive Performance

The adhesive S2060NP is suitable for pharmaceutical applications at low temperatures (around 5°C) and for secondary blood bag labelling. High initial tack and excellent adhesion on glass, PE, PP and cardboards.

### Applications and use

The flexible facestock allows application on small cylindrical containers, test tubes, curved substrates and on other known substrates in the pharmaceutical industry. The luminescent properties of the product allow automatic label dispensing and/or missing label control using UV-light detection equipment.

Own testing under practise conditions recommended.

### Conversion & printing

Excellent conversion characteristics in rotary and flat-bed. The double coated flexible paper allows fine-quality printing in letterpress, offset, flexo, screen, hot foil stamping and permits high quality printing of small typeface and difficult characters with optimum results

### Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs. It is in compliance with DIN ISO 3826 for secondary blood bag labelling.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AM226

## Fasson ®

### LW FSC - S2060NP-BG40BR IMP

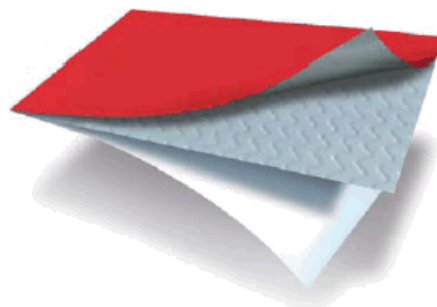

LW FSC

S2060NP

BG40BR

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

**Avery Dennison Materials Group Europe**

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

**Warranty**

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.