

Facestock

A bi-axially oriented, gloss polypropylene film with a print-receptive top coating and black opaque coating on the back side.

Basis Weight 45 g/m² ISO 536

Caliper 60 µm ISO 534

Adhesive

A general purpose permanent, rubber based adhesive.

Liner

BG40 white, a supercalendered glassine paper.

Basis Weight 60 g/m² ISO 536

Caliper 53 µm ISO 534

Laminate

Total Caliper 132 µm±10% ISO 534

Performance data

Initial Tack 18 N/25mm FTM 9 Glass

Peel Adhesion 90° 9 N/25mm FTM 2 St.St.

Min. Application Temp. 0 °C

Service temperature -40°C to 70°C

Adhesive Performance

The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, slightly rough and curved substrates.

Particularly good performance at lower temperatures, e.g. labeling of chilled products.

Applications and use

Labels for cosmetics and toiletries, household chemicals, appliances, toys, etc. Promotional labels and stickers for indoor and outdoor use.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Conversion & printing

Can be printed by letterpress, screen, flexo and gravure, using UV-, solvent- or water-based inks.

Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XXI as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs.


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AA297

Fasson®

PP NG TOP WHITE OPQ - S2045N-
BG40WH FSC

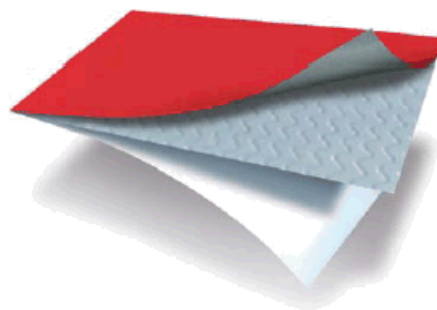

PP NG TOP WHITE OPQ

S2045N

BG40WH FSC

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery



©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are



Inspired Brands.
Intelligent World.™

Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.