

### Facestock

A white machine coated, supercalendered woodfree printing paper with semi gloss finish and blue opaque layer on the backside. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	93 g/m <sup>2</sup>	ISO 536
Caliper	85 µm	ISO 534

### Adhesive

A general purpose permanent, acrylic based adhesive.

### Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight	55 g/m <sup>2</sup>	ISO 536
Caliper	49 µm	ISO 534

### Laminate

Total Caliper	148 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	15 N/25mm	FTM 9 Glass
Peel Adhesion 90°	8 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

### Adhesive Performance

The adhesive is characterized by a high initial tack, excellent adhesion and good low temperature performance on a wide variety of substrates.

### Applications and use

Opque 'coverall' materials are traditionally used for overlabelling of errors, size changes on existing printed materials, or for barcoding where the underlying substrate may interfere with scannability.

### Conversion & printing

Facestock is suited to single and/or multicolour line process printing by letterpress, offset, flexo, screen and hot foil stamping. If required the labels can be upgraded to a higher gloss level by additional varnishing.

### Special Approvals

S2000N complies with the European food directives and legislations, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assesment. The adhesive side may stand in direct contact with dry, moist and such fatty foodstuffs which have a correction factor of at least 3 according to the Regulation (EU) No 10/2011.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

# AA571

## Fasson®

### MC PRIMECOAT OPQ BL FSC - S2000N-BG40BR

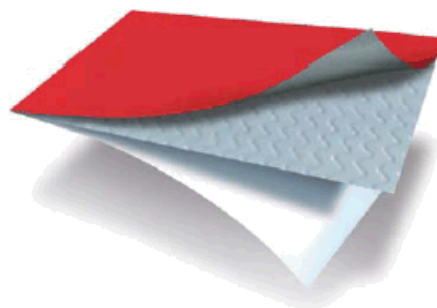

MC PRIMECOAT OPQ BL FSC	
----------------------------	--

S2000N	
--------	---

BG40BR	
--------	---

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000



**Warranty**

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.