

### Facestock

A natural unbleached, uncoated, laid watermarked, printing paper. The facestock is made from PEFC™ certified paper (PEFC Certification Number C807907PEFC-01.2007). PEFC Certification ensures that products are sourced from responsibly managed forests.

Basis Weight	90 g/m <sup>2</sup>	ISO 536
Caliper	130 µm	ISO 534

### Adhesive

A general purpose permanent, rubber based adhesive for the wine industry.

### Liner

BG45 white, a supercalendered glassine paper.

Basis Weight	70 g/m <sup>2</sup>	ISO 536
Caliper	61 µm	ISO 534
Transparency	50 %	DIN 53147

### Laminate

Total Caliper	208 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	23 N/25mm	FTM 9 Glass
Peel Adhesion 90°	12 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-30°C to 70°C	

### Adhesive Performance

The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, and slightly rough substrates.

### Applications and use

This product is suitable for sustainable labelling of high and premium goods eg: spirits, specialist foods. It has a 'natural' image.

### Conversion & printing

Printable by all conventional printing techniques. Due to open and textured nature of the facematerial, best results are in general from those techniques that give maximum conformability of printing plate such as flexo and offset. Also excellent results using screen printing.

### Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XXI as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs.

The face material is compliant with 1935/2004/EC requirements for direct contact with all types of food under for long term, room-temperature applications.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AF957

## Fasson®

## NATURAL BOIS PEFC - S2047N-BG45WH IMP

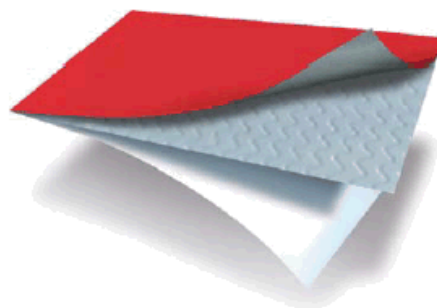

NATURAL BOIS PEFC

S2047N

BG45WH

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

**Avery Dennison Materials Group Europe**

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

**Warranty**

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.