

Facestock

A semi-gloss white, one side coated, lightweight, calendered, woodfree printing paper. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	62 g/m ²	ISO 536
Caliper	54 µm	ISO 534
Fluorescence	>9	Laetus Scale

Adhesive

A special permanent, acrylic based adhesive, for the pharmaceutical industry.

Liner

BG40 white, a supercalendered glassine paper.

Basis Weight	61 g/m ²	ISO 536
Caliper	54 µm	ISO 534

Laminate

Total Caliper	125 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	14 N/25mm	FTM 9 Glass
Peel Adhesion 90°	8.5 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	
Peak Adhesive Stability (1hr)	150 °C	

Adhesive Performance

S692NP is a clear permanent adhesive developed for the pharmaceutical industry with lowest risk for migration. It has excellent UV resistance together with good adhesion performance, even on apolar substrates.

Applications and use

The flexible facestock allows application on small cylindrical containers, test tubes, curved substrates and on other known substrates in the pharmaceutical industry. The luminescent properties of the product allow automatic label dispensing and/or missing label control using UV-light detection equipment.

Conversion & printing

Excellent conversion characteristics in rotary and flat-bed. The double coated flexible paper allows fine-quality printing in letterpress, offset, flexo, screen, hot foil stamping and permits high quality printing of small typeface and difficult characters with optimum results

Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs.


Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AH431

Fasson®

LW FSC - S692NP-BG40WH

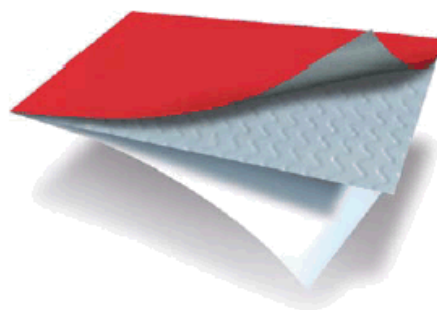

LW FSC

S692NP

BG40WH

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

**Warranty**

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.