

### Facestock

A white, one side machine coated, woodfree printing paper with semi-gloss appearance.

The facestock is made with FSC certified pulp (FSC Mix Credit , chain-of-custody number: CU-COC-807907).

Basis Weight	70 g/m <sup>2</sup>	ISO 536
Caliper	65 µm	ISO 534

### Adhesive

An all temperature permanent, acrylic based adhesive.

### Liner

BG30 brown FSC, a supercalendered glassine paper.

Basis Weight	50 g/m <sup>2</sup>	ISO 536
Caliper	46 µm	ISO 534

### Laminate

Total Caliper	121 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	14 N/25mm	FTM 9 Glass
Peel Adhesion 90°	7 N/25mm	FTM 2 St.St.
Min. Application Temp.	-5 °C	
Service temperature	-30°C to 70°C	

### Adhesive Performance

The adhesive is characterized by a high initial tack, excellent adhesion and excellent low temperature performance on a wide variety of substrates, especially on PE below +5° C.

### Applications and use

The product is suitable for a wide range of promotional and industrial label applications where attractive semi-gloss appearance in multi-colour work is required.

Designed for flat chilled food applications. Limited performance on curved surfaces (mandrel).

### Conversion & printing

Facestock is suitable for single and/or multicolour line or process printing by letterpress, offset, flexo, screen and hot foil stamping.

There might be limitations for difficult label shapes and high speed wide width converting.

The thinner liner requires more care taken in the die cutting process to avoid over cutting into the liner.

### Special Approvals

The adhesive complies with the European food directives and legislations and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. According to the European requirements, the adhesive side may stand in direct contact with dry, moist and such fatty foodstuffs which have a correction factor of at least 3 according to the Regulation (EU) No 10/2011.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AL703

## Fasson ®

## MC70 FSC - S2020N-BG30BR FSC

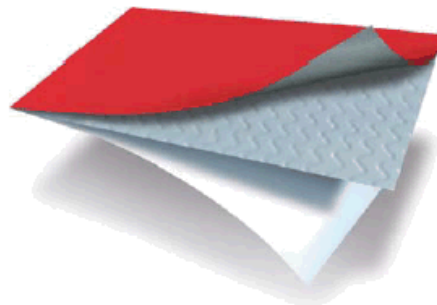

MC70 FSC

S2020N

BG30BR FSC

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000



#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.

ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.