

Facestock

A white woodfree, top coated thermal paper, with a black imaging thermosensitive coating providing good resistance to moisture, fat, oil, alcohol. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	76 g/m ²	ISO 536
Caliper	82 µm	ISO 534
Max Print Speed	250 mm/sec	
Image Density (Typical)	1.2 odu	

Adhesive

A special purpose permanent, rubber based adhesive.

Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight	55 g/m ²	ISO 536
Caliper	49 µm	ISO 534

Laminate

Total Caliper	145 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	12 N/25mm	FTM 9 Glass
Peel Adhesion 90°	6 N/25mm	FTM 2 St.St.
Min. Application Temp.	-5 °C	
Service temperature	-40°C to 60°C	

Adhesive Performance

The adhesive features excellent wettability and adhesion to a wide variety of substrates including apolar surfaces. It is specially designed for automatic label dispensing, in particular for air blowing dispensing systems at cool temperature down to 0°C.

Applications and use

This Direct Thermal product is designed for use in retail item level applications where some resistance to oil, moisture and heat is required, and some short term wet exposure can be expected. Typical end use applications include front of store labeling and wall-to-wall process tracking. Longer term contact with moisture, oil, fats, plasticisers and exposure to strong lighting can cause potential image fading.

Conversion & printing

The product can be converted by all conventional roll conversion technologies including flexographic and UV letter press. However, due to the thermographic properties, exposure above 50°C may cause premature imaging or discoloration. It is advisable to test inks and varnishes before conversion.

We generally recommend not to pre-print the label area that needs to be thermally printed.

Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XXI as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs.


Shelf life

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AP764

Fasson ®

THERMAL TOP K8P FSC - S2065N-BG40BR

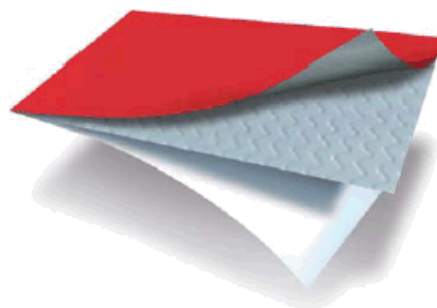

THERMAL TOP K8P FSC

S2065N

BG40BR

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.