

Facestock

A clear polyethylene film with a topcoat for best results with HP Indigo printing. Shows excellent image quality and adhesion without need for in-line priming. Suitable for application to squeezable containers.

Basis Weight	84 g/m ²	ISO 536
Caliper	82 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

BG40 white, a supercalendered glassine paper.

Basis Weight	60 g/m ²	ISO 536
Caliper	53 µm	ISO 534

Laminate

Total Caliper	155 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	10 N/25mm	FTM 9 Glass
Peel Adhesion 90°	6 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

Applications and use

The product is used in a variety of labelling applications, when the advantages of digital printing: short runs, last minute changes, personalised layouts and fast turn-round full colour printing are required.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Conversion & printing

The topcoat ensures printability for HP Indigo press and related engines, with excellent anchorage and scuff resistance without the need of in-line priming. Print quality in conventional processes and combination with laquers to be tested. Excellent conversion characteristics in rotary and flat-bed. It is recommended to overvarnish or overlamine the product to protect the print for applications with high level of scratching.

Special Approvals

S692N complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA § 175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive S692N may safely stand in direct contact with dry, moist and fatty foodstuffs which have a reduction factor of at least 2 according to the Commission Regulation (EU) No 10/2011.


Shelf life

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AQ814

Fasson®

**DIG INDI PE85 TOP CLEAR - S692N-
BG40WH FSC**

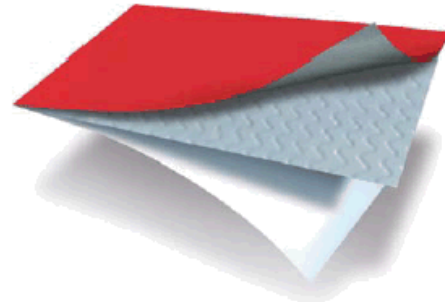

DIG INDI PE85 TOP CLEAR

S692N

BG40WH FSC

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.