

Facestock

A White, uncoated matt 100% Cotton paper with a Unique 'Velvet finish' appearance. Wet strenght and fungicidal treatments.

Basis Weight	120 g/m ²	ISO 536
Caliper	220 µm	ISO 534

Adhesive

A general purpose permanent, rubber based adhesive for the wine industry.

Liner

BG45 white, a supercalendered glassine paper.

Basis Weight	70 g/m ²	ISO 536
Caliper	61 µm	ISO 534
Transparency	50 %	DIN 53147

Laminate

Total Caliper	308 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	35 N/25mm	FTM 9 Glass
Peel Adhesion 90°	18 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-30°C to 70°C	

Adhesive Performance

The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, and slightly rough substrates.

Applications and use

This product is designed for Wine labelling, it is suitable for primary labelling of high and premium goods eg: spirits, specialist foods. Due to its high stiffness it is not recommended for labelling on small diameter surfaces (neck labels) or more difficult curved bottles. It is important to apply adequate pressure during the labelling process to ensure a good adhesion performance on the substrate. In addition bottles should be washed and dried before label application to ensure optimum adhesion. It is recommended to run a dispensing test in order to check that pressure is adequate, especially in case of more complex label shapes.

Conversion & printing

Printable by Offset, Screen, Hot Foil.


Shelf life

One year under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

AU266

Fasson®

COTTON WHITE - S2047N INC-BG45WH

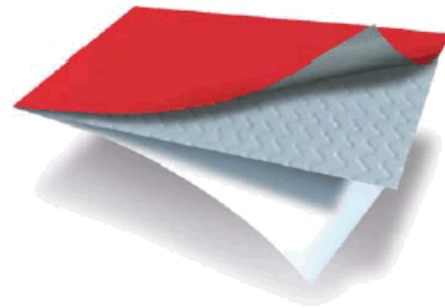

COTTON WHITE

S2047N

BG45WH

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see



©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery



Inspired Brands.
Intelligent World.™

<http://terms.europe.averydennison.com>

Dennison.