



**AW688**

**Fasson®**

**PAPER WEB MET PP**

**A white Coated  
paper faced  
laminated pouching  
material used in  
flexible packaging of  
dry goods.**

## Key Features

- > Adhesive coated two layer laminate (C1S paper 50gsm /Adh/metallized OPP 20 µm).
- > Semi gloss surface
- > Heatsealable
- > Laminate for pouches and tea envelopes.
- > High barrier against gas and water vapour.

### Europe

Lammenschansweg 140  
2321 JX Leiden  
The Netherlands  
+31 71 579 4100

### Facestock

Grammage	72±7%	g/m <sup>2</sup>	Calculated (not measured)
Caliper	66±10%	µm	Calculated (not measured)
OTR	≤ 15	cm <sup>3</sup> /m <sup>2</sup> /day	23° C; 50% r. F.
WVTR	≤ 0,5	g/m <sup>2</sup> /day	38° C, 90% r.H.
Seal Initiation Temperature	120	°C	

### Applications and use

Flexible packaging laminates for pouches and tea envelopes. Tea is a sensitive product, easily affected by moisture, oxygen and UV. The envelopes made with Paper Web Met PP is preserving the great flavour of the tea.

### Conversion/printing

Easy printing on the high quality coated paper in rotogravure, letterpress, UV Flexo, UV Offset and digital – low-odour inks are advised.

### Shelf life

Unless specified otherwise in this document, one year when stored at 72°F at 50% RH. Processing must be carried out within 6 months after date of production. A longer shelf life has to be tested with the help of long term tests.


### Storage

Storage at 15 – 35°C and 45-75% relative humidity is recommended for unfilled packaging.

# AW688

## Fasson®

### PAPER WEB MET PP

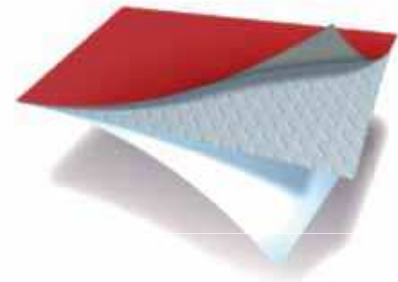

C1S paper 50 gr

Adhesive

OPP Met 20 µm

### Statement of Practical Use

As with all pressure sensitive materials, this product should be tested thoroughly under end-user conditions to ensure it meets the requirements of the specific application. This is particularly the case if the intended use is for food or use directly on skin. Avery Dennison therefore request the client to do sufficient testing to make sure that the intended application does not cause any harm and is safe.

### Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damages. NO EXPRESS WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERNATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON. No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.